




Verti-Lifter Stand Up Floor Tile Puller

Models A6550 & A6555

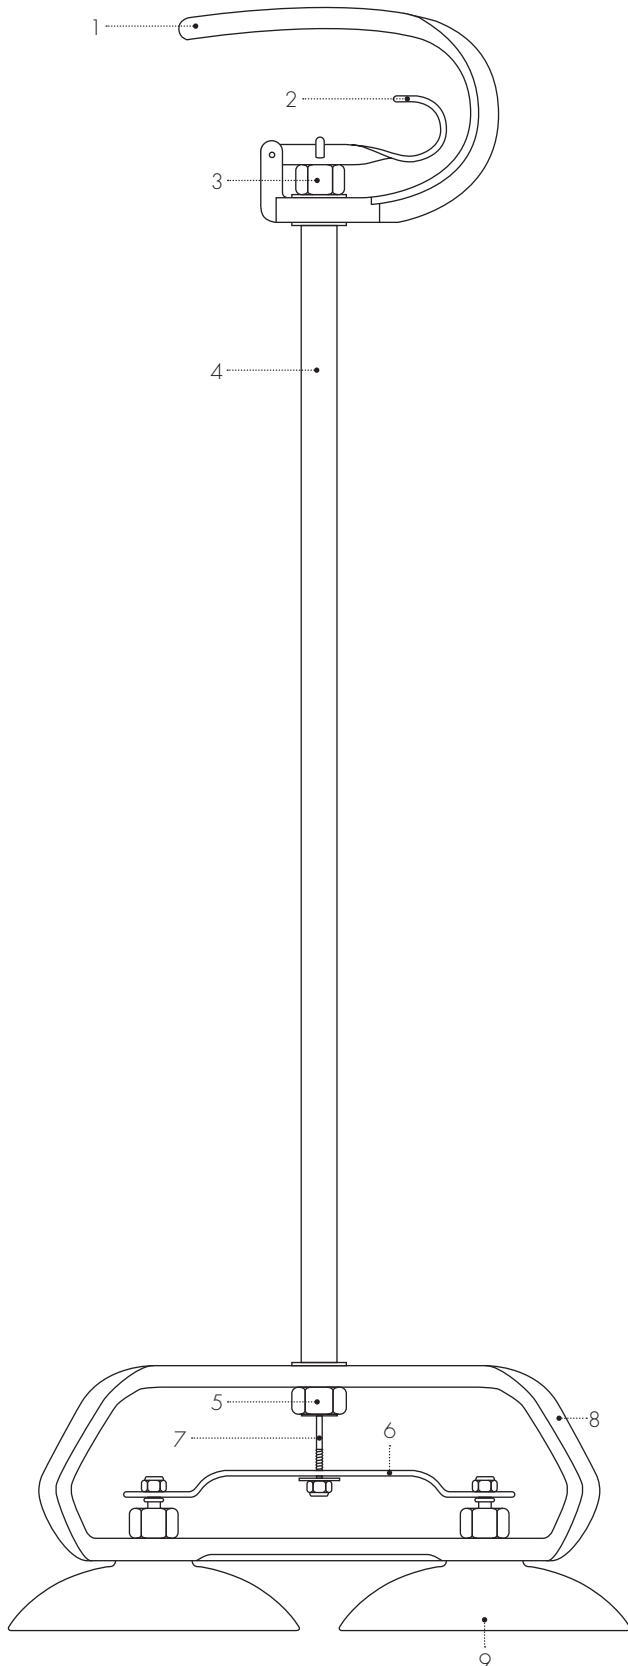

Instructions for Proper Use of the Verti-Lifter Stand Up Floor Tile Puller

Thank you for your purchase. The following are instructions for safe use of your new Verti-Lifter.

To Attach To Attach the Verti-Lifter, place the suction cups on top of a clean floor tile that is lying flat. With your hand gripping the top of the handle (#1), gently press down on the handle forcing air out between the suction cups and the floor tile. Removing the air creates a vacuum seal. You will know that the suction cups have sealed onto the floor tile because they will compress downward and remain flat.

To Release the vacuum seal, place the palm of your hand on the top of the handle and lift up **gently** on the release trigger with your fingertips until the suction cups disengage. The release trigger (#2) is located below the top of the handle. Do not lift up on the Verti-Lifter handle until the suction cups disengage completely. The release bar on the base may bend if the release trigger is lifted with excessive force, causing it to eventually break.

Do not lift the release trigger while attaching the Verti-Lifter to the floor tile.

Only lift the release trigger after the Verti-Lifter has safely been attached to a floor tile - when you need to release the suction cups from the floor tile. Lifting up on the release trigger while attaching the Verti-Lifter's suction cups to the floor tile may cause the release trigger to eventually break.

- **Make sure** that the floor tile is resting either in its frame or is on the floor before lifting up on the release trigger. Do not release the suction cups when the weight of the load is being supported by the Verti-Lifter.
- **Use the Verti-Lifter only** as a hand lifting tool for short term handling.
- **The Verti-Lifter works best** on a clean and smooth floor tile. You may want to clean a floor tile with a rag or paper towel before lifting it. Also, if the floor tile is badly scratched on the surface, the suction cups will not fully seal and the Verti-Lifter may only hold for a short time. We recommend replacing those floor tiles if they are to be lifted repeatedly.
- **When finished using the Verti-Lifter**, store it with the suction cups in their natural relaxed position. Storing it on its side or leaning it against a cabinet or table could cause the cups to become misshapen thereby creating a small gap for air when being used. We recommend storing the Verti-Lifter on a Wall Bracket so that there is no weight being placed on the rubber suction cups. We offer a variety of Wall Brackets.
- **For lifting floor tiles we only recommend the Verti-Lifter with dual 5" diameter suction cups; which is rated to safely lift up to 75 lbs./34 kg.** We sell Verti-Lifters with dual 4" diameter suction cups for lifting small, lightweight floor tiles. We recommend the dual 4" diameter Verti-Lifter for floor tiles that do not exceed 30 lbs./14 kg.

Parts List

- | | | |
|---------------------|------------------|-----------------------|
| 1. Handle | 4. Steel Pipe | 7. Release Hook |
| 2. Release Trigger | 5. Steel Hex Nut | 8. Base |
| 3. Aluminum Hex Nut | 6. Release Bar | 9. Vacuum Suction Cup |

Effective date: September 2017.